

GBL Series

LED Gooseneck Sign Light Specifications

Project _____

Date _____ Type _____



Description

GBL series gooseneck sign lights are a combination of classic architectural style and reliable LED performance. Wall mount fixture design illuminates signs, awnings, storefronts, and more. Angled shade casts a controlled flood beam that is directed down or toward the surface it's attached to, adjusted with the swivel head. The die cast aluminum housing comes in various finishes to compliment a variety of spaces and resist corrosion. Integrated LEDs keep out bugs and debris and eliminate the need for bulb replacement. Though durable enough to withstand outdoor installation for signage, the sleek modern design can also be used in interior locations such as restaurant menu boards or wall artwork.

Mechanical

- Wall mount to junction box with integral bracket
- Swivel knuckle allows angle adjustment up to 180°
- Available in black, architectural bronze, or white finish
- Die cast aluminum housing with polycarbonate lens
- Gasketed enclosure
- Gooseneck arm design and 10 in. angled dome shade
- Operating temperature of -22°-122° F (-30°-50° C)
- IP65 rated for wet conditions

Electrical

- 120-277 VAC input
- 20 W
- 0-10 V dimmable
- 50,000 hour (L70 rated) lifespan
- 20 AWG wiring

Photometrics

- 100° beam angle
- 2,400 lumens / 120 lm/W
- 80+ CRI 4000K light

Available Models¹

- GBL-40K20T8-L15SLBK
- GBL-40K20T8-L15SLBR
- GBL-40K20T8-L15SLWH

Part Number Breakdown

Example: GBL-40K20T8-L15SLBK

| Family | Color Temperature | Wattage | Design | Finish |
|--------|-------------------|-------------|--|------------|
| GBL | 40K [4000K] | 20T8 [20 W] | L15SL [gooseneck with sloped shade] | BK [black] |
| | | | | BR [brown] |
| | | | | WH [white] |

Certifications and Compliances

These lights are UL Listed in compliance with UL 1598 (IFAM).




Application

Easily replace inefficient ? fixtures such as those used to light signs, advertisement and menu boards, artwork, awnings, and banners. These are a great solution for wall washing and work very well for storefronts, restaurants, and other areas where good lighting is needed to highlight information or the features of a retail space.

Warranty

Five (5) Year Warranty.

Beam Angle

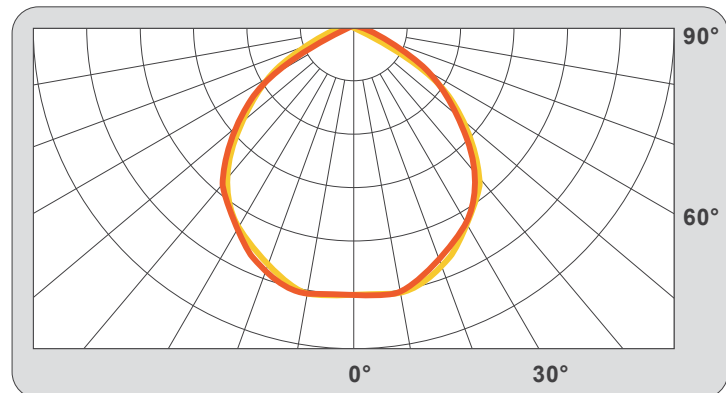


¹Contact customer service if interested in options other than those listed.

GBL Series

LED Gooseneck Sign Light Specifications

Dimensional Drawing

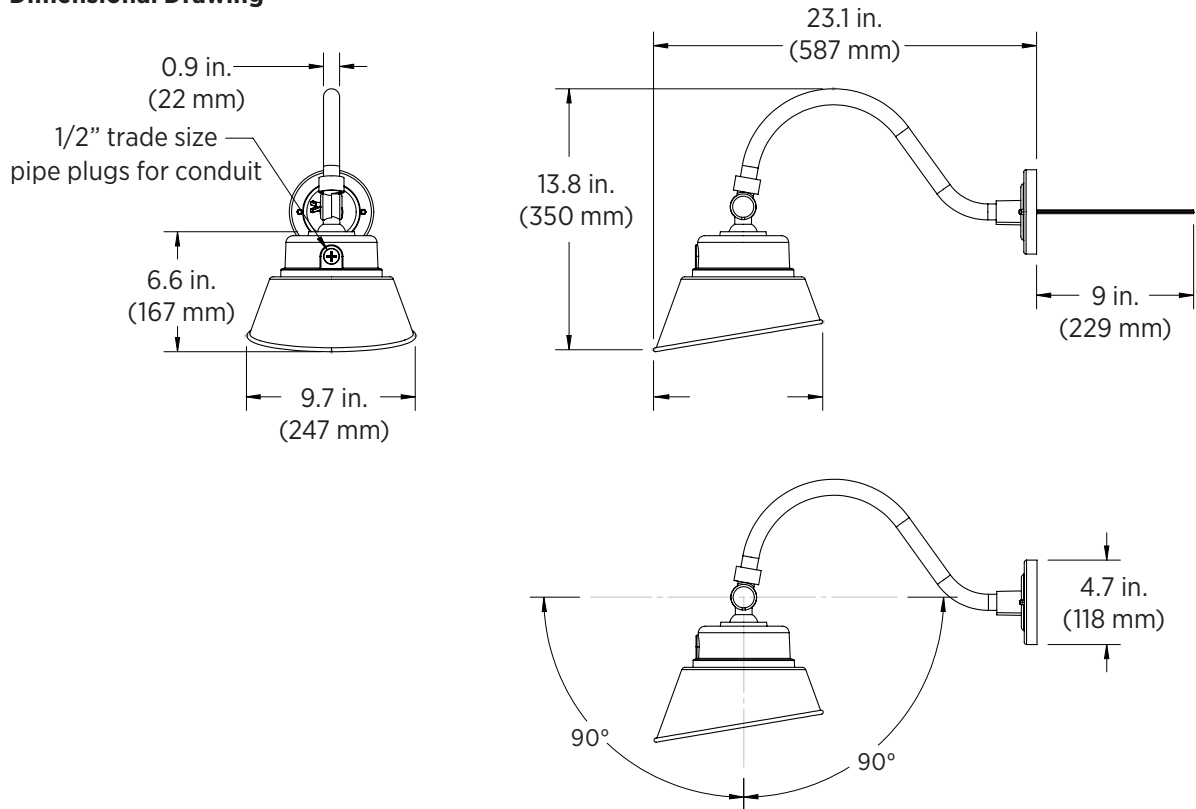

Specifications

| Model | GBL-40K20T8-L15SLBK | GBL-40K20T8-L15SLBR | GBL-40K20T8-L15SLWH |
|-------------------------------|------------------------------------|--|---------------------|
| Operating Voltage | 120-277 VAC | | |
| Power Consumption | 20 W | | |
| Current Draw | 167 mA @ 120 VAC / 72 mA @ 277 VAC | | |
| Intensity | 2,400 lm | | |
| Efficacy | 120 lm/W | | |
| Color Temperature | 4000K | | |
| Beam Angle | 100° | | |
| CRI | 80+ | | |
| Dimming | 0-10 V | | |
| IP Rating | IP65 | | |
| Ambient Operating Temperature | -22°-122° F (-30°-50° C) | | |
| Product Weight | 3.3 lb (1.5 kg) | | |
| Rated Life (L70) | 50,000 hours | | |
| Finish | black (RAL 9017) | architectural bronze (Pantone 412C) | white (RAL 9016) |

