




PARKING LOT LIGHTING STANDARD WITH CONCRETE BASE (TYP) SEE SHEETS C180A & C180B

5 CAST IN PLACE CONCRETE CURB (TYP) C530

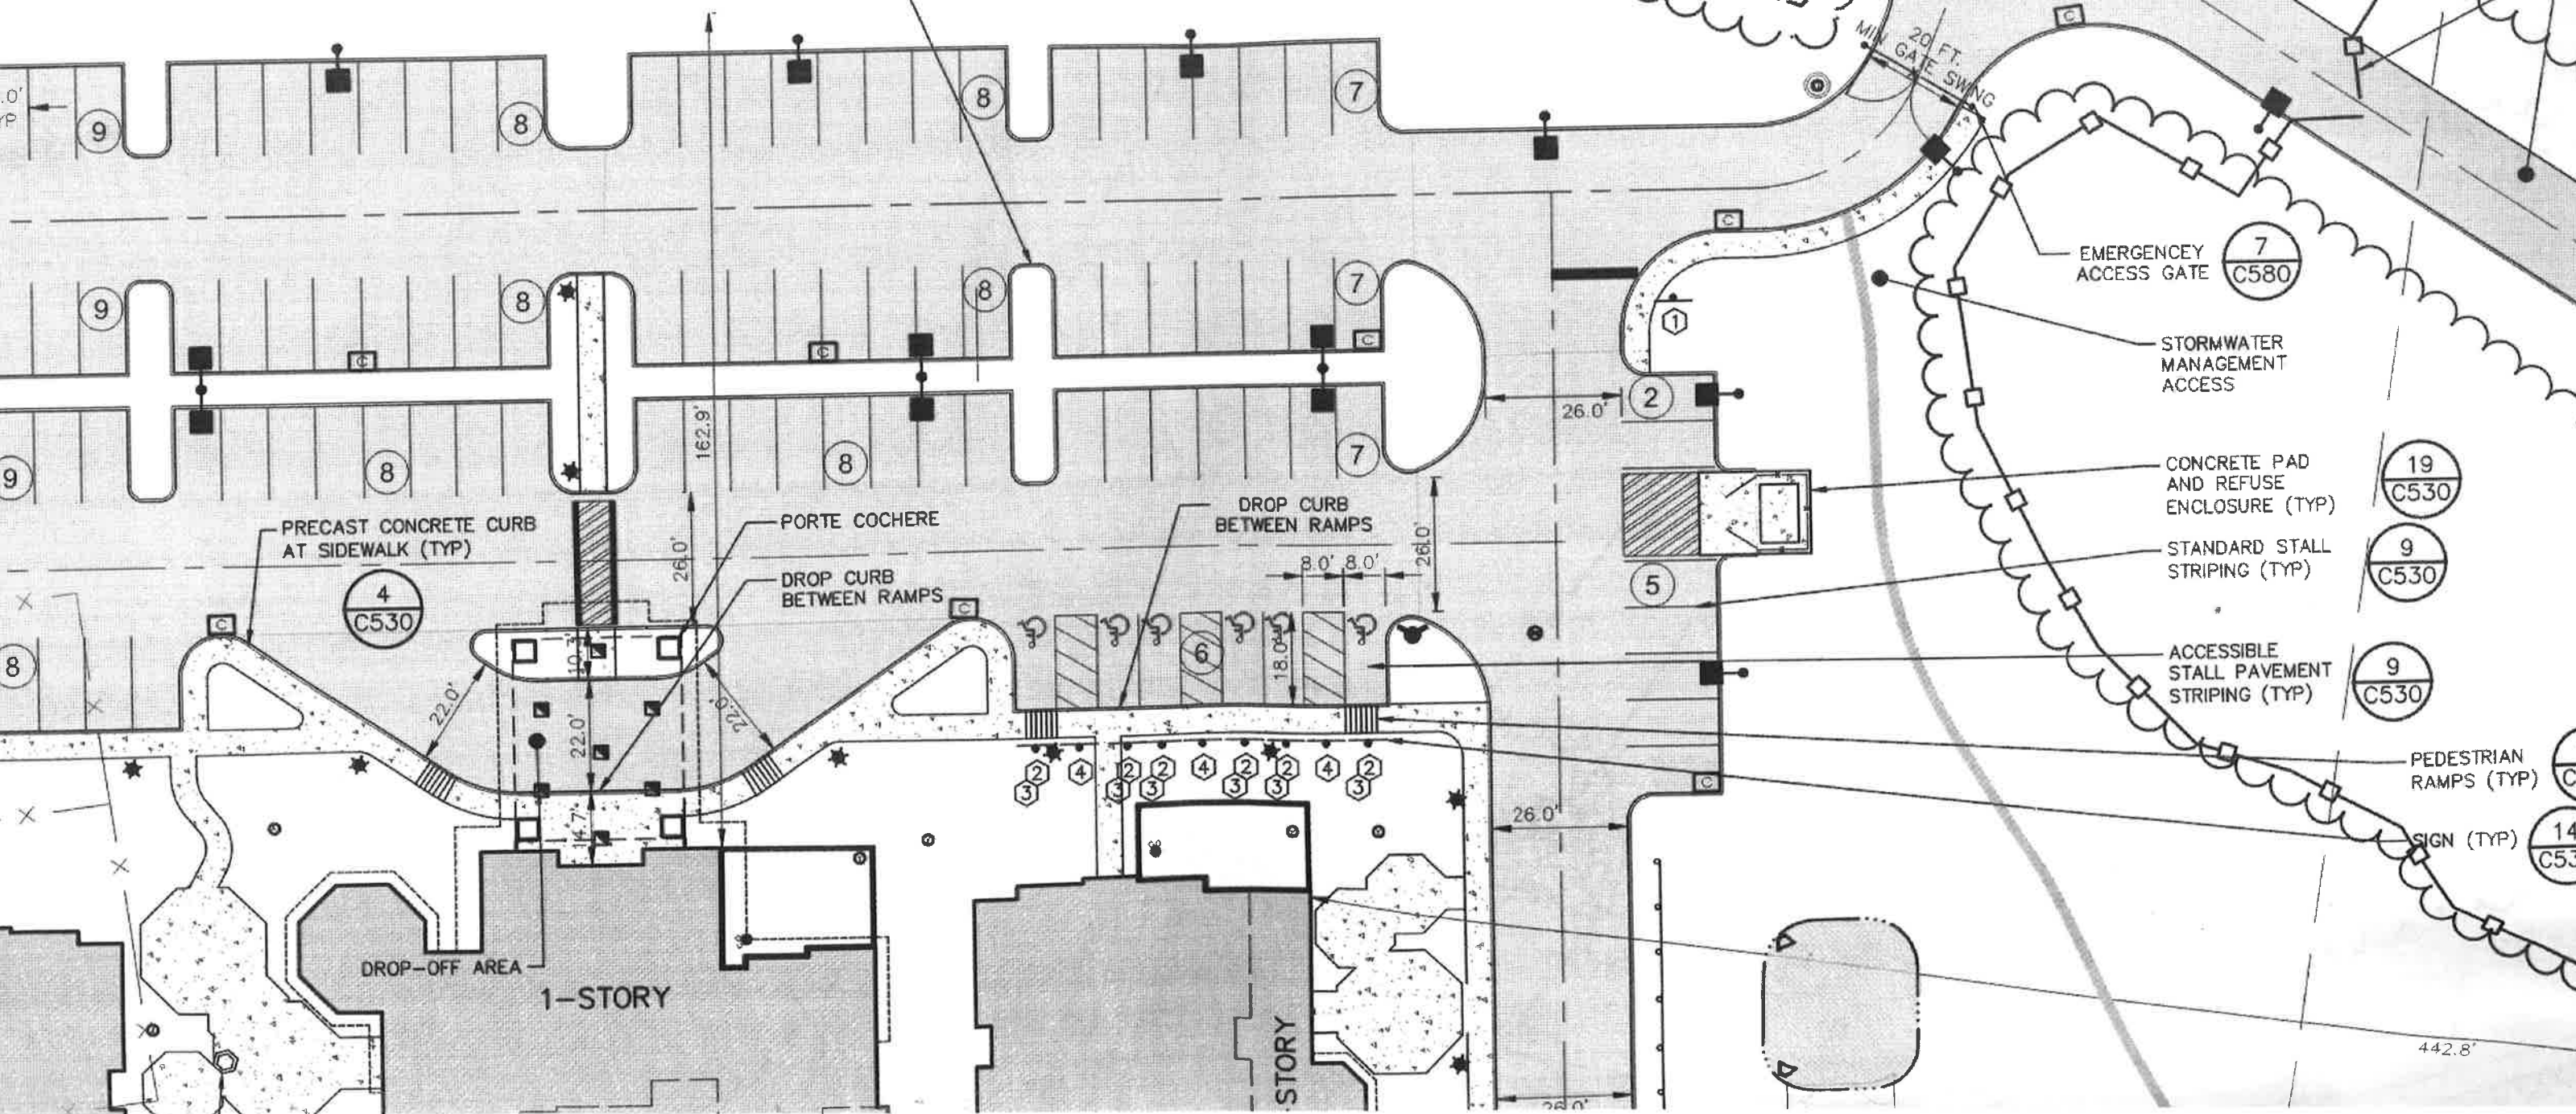

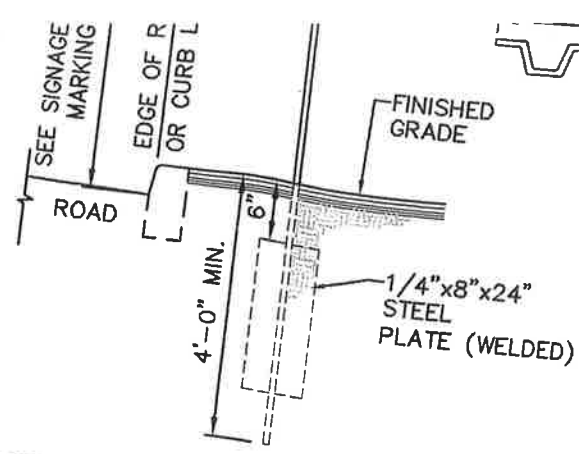

12 SINGLE POST STOP SIGN MOUNTING DETAIL
SCALE: NOT TO SCALE

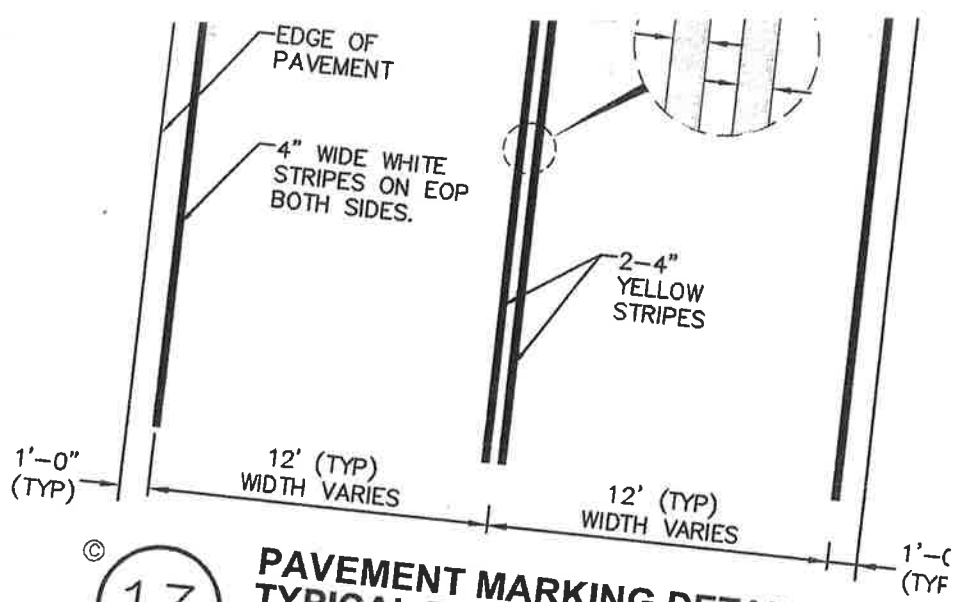

13 PAVEMENT MARKING DETAIL TYPICAL ROAD STRIPING
SCALE: NOT TO SCALE


Sign Number	Sign Text	Size	Background Color	Text Color	Material
3	VAN ACCESSIBLE	R7-8	12"x18"	WHITE/BLUE	GREEN/WHITE
4	NO PARKING ANY TIME	R7-8p	12"x6"	WHITE	BLUE
5	NO PARKING FIRE LANE	R7-1	12"x18"	WHITE	RED
5	NO PARKING FIRE LANE	R8-31	12"x18"	WHITE	RED

14 MUTCD SIGN SCHEDULE
SCALE: NOT TO SCALE

PARKING STAL STRIPING TYF


NOTE
1. ALL SPEC MAY SECT.
2. SLOP OR AS
3. DETEC IN AC

15 PEL SCALE

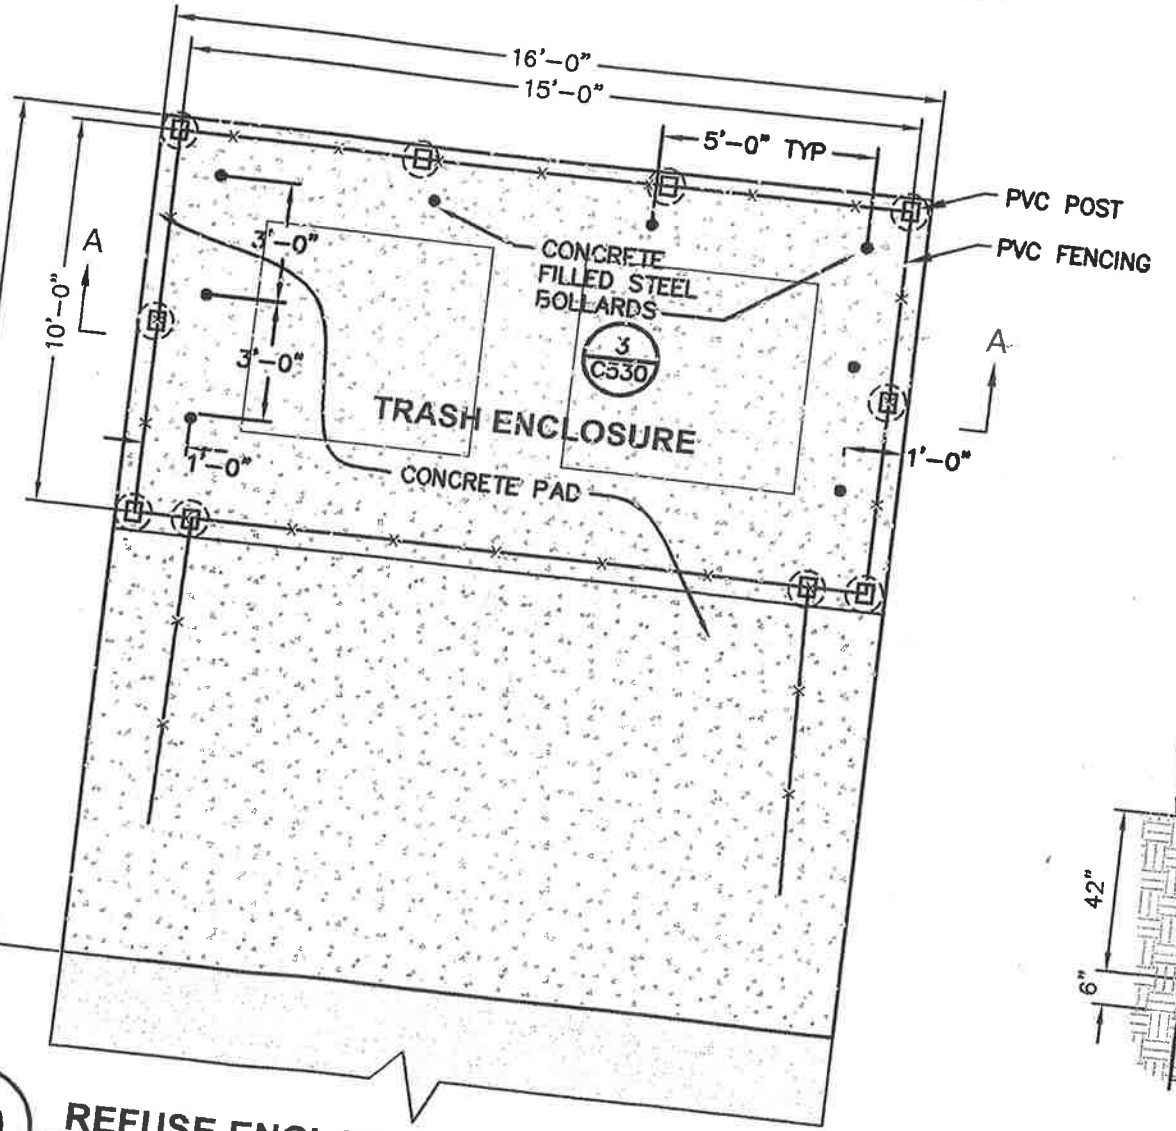


9 REFUSE ENCLOSURE
SCALE: NOT TO SCALE

- NOTE:
1. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 4,500 PSI AT 28 DAYS AND SHALL BE PLACED IN ACCORDANCE WITH ACI SPECIFICATIONS AND ITS' LATEST REVISIONS.
 2. EXPOSED CONCRETE SURFACES SHALL BE TREATED WITH "SUREBOND"/"SAFE BOND" SB-7000 INTENSIFIER BRIGHT PROTECTOR AND SIDEWALK SEALER, OR EQUAL RATE AND METHOD OF APPLICATION SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
 3. PROVIDE EXPANSION JOINTS @ 10- FEET ON CENTER.

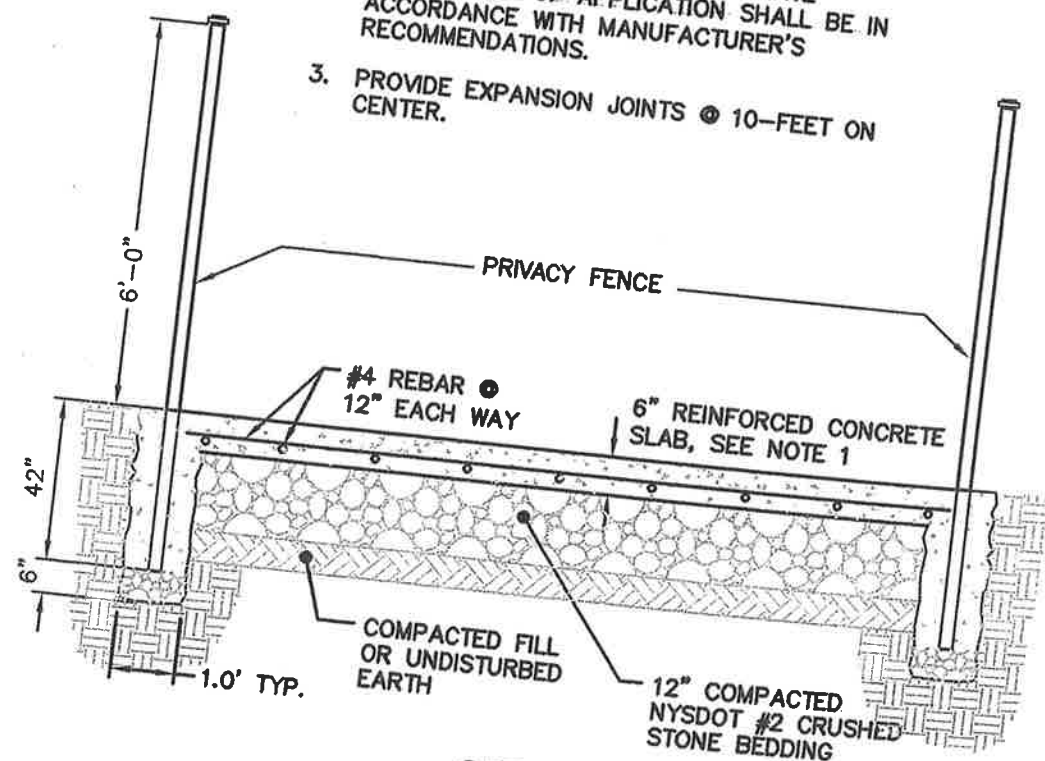

SECTION A-A

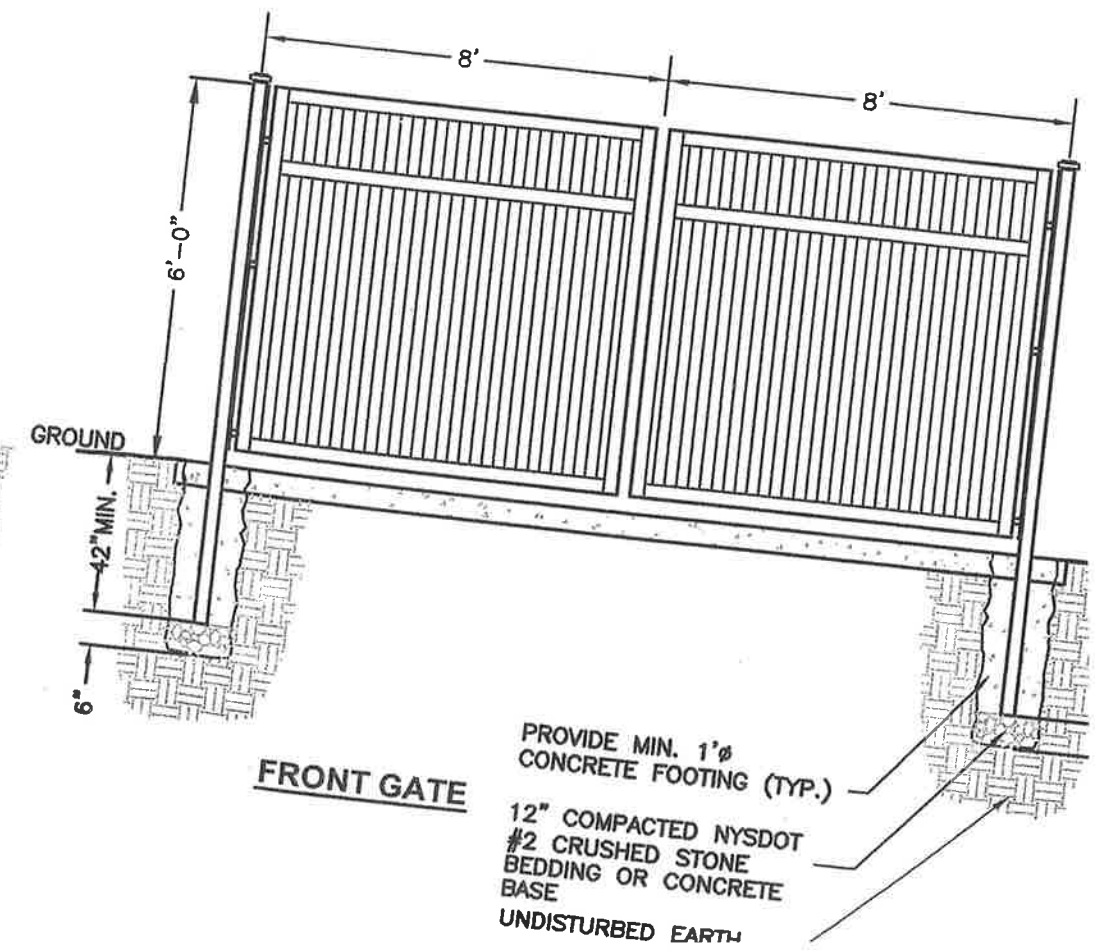

FRONT GATE

PROVIDE MIN. 1"Ø CONCRETE FOOTING (TYP.)

12" COMPACTED NYSDOT #2 CRUSHED STONE BEDDING OR CONCRETE BASE
UNDISTURBED EARTH